

Active Probe for SMDs

P6245 • P6243 Datasheet



P6243

Features & Benefits

P6245

- ≥ 1.5 GHz Bandwidth (Typical, Probe Only)
- ≤ 1 pF Input Capacitance
- 1 M Ω Input Resistance
- Direct Access to SMDs as Small as 0.5 mm Pitch
- Measures CMOS, BiCMOS, ECL, GaAs, and TTL Logic

P6243

- 1 GHz Bandwidth (probe only)
- ≤ 1 pF Input Capacitance
- 1 M Ω Input Resistance
- Direct Access to SMDs as Small as 0.5 mm Pitch
- Measures CMOS, BiCMOS, ECL, GaAs, and TTL Logic
- Low-mass Probe Head/Cable
- No Additional Power Supplies or Cables Are Required with TEKPROBE™ BNC Interface

Applications

- High-speed Digital Systems Design
- Component Design/Characterization
- Manufacturing Engineering and Test
- Educational Research

P6245 and P6243 Active Probes for TEKPROBE BNC Interfaces

P6245

The P6245 Active FET probe achieves high-speed signal acquisition by solving three traditional problems:

- Lower DUT loading (≤ 1 pF/1 M Ω probe loading)
- Direct and easy access to SMDs
- Access DUT signals and scope bandwidth for TDS600/700/3000/5000/6000/7000*1 and CSA7000 scopes up to 1 GHz bandwidths

The P6245 and P6243 Active probes provide the electrical and mechanical performance required for today's digital systems designs. No additional power supplies or cables are required when used with TEKPROBE BNC oscilloscopes. Both the P6245 and P6243 achieve high-speed signal acquisition and low circuit loading, required for solving today's problems faced by designers.

The small compact probe head and versatile attachment accessories allow direct connection to the device under test.

The P6245 and P6243 Active Probes provide scope bandwidth at the probe tip for the TDS500/600/700; the P6243 provides scope bandwidth at the probe tip for the TDS3000 Series scope up to 1 GHz bandwidth.

*1 Some TDS6000 or TDS7000 oscilloscopes require a TCA-BNC adapter.

P6243

The P6243 Active FET probe is the high-performance probing solution for 500 MHz oscilloscopes. The P6243 has a probe only bandwidth of 1 GHz and will provide a 500 MHz system bandwidth when used with Tektronix' full line of 500 MHz oscilloscopes. In addition, the P6243 is powered by the TEKPROBE BNC interface, eliminating the need for additional power supplies and cables when used with TEKPROBE BNC oscilloscopes.

The P6243 offers superior signal acquisition on surface mount devices compared to the much higher capacitive loading of passive probes. The P6243 has ≤ 1 pF capacitive loading which allows it to measure high-speed signals without affecting the signal or device under test. Furthermore, the included accessories and adapters allow for easy attachment to SMDs.

Characteristics

| Probe Type | P6243 | P6245 |
|-------------------------------------|---------------------|---------------------|
| Cable Length | 1.3 m | 1.3 m |
| Attenuation | 10X | 10X |
| Bandwidth in GHz (Probe Only) | 1 GHz | 1.5 GHz |
| Rise Time | <350 ps | <250 ps |
| Input C in pF | ≤ 1 pF | ≤ 1 pF |
| Input R in Ω | 1 M Ω | 1 M Ω |
| Linear Dynamic Range | ± 8 V | ± 8 V |
| DC Offset Range | N/A | 10 V |
| Max Voltage (Nondestruct) (DC+PkAC) | ± 15 V | ± 15 V |
| Propagation Delay | 5.3 ns ± 200 ps | 5.3 ns ± 200 ps |

Ordering Information

P6245

Active Probe.

P6243

Active Probe.

Included Accessories

| Description | Quantity P6245 | Quantity P6243 | Reorder Part Number |
|-------------------------------------|----------------|----------------|--------------------------|
| Solderable Probe Tips | 10 each | 10 each | 131-5638-xx (Pkg. of 10) |
| 1 in. Ground Lead | 2 each | 2 each | 196-3439-xx (Pkg. of 10) |
| 6 in. Ground Lead | 2 each | 1 each | 196-3436-xx |
| 3 in. Ground Lead | 2 each | 1 each | 196-3437-xx |
| Y Lead Adapters | 2 each | 1 each | 196-3463-xx |
| SMT KlipChip™ Adapter | 4 each | 2 each | 206-0364-xx |
| Color Coding Clips, 2 each 5 colors | 1 each | 1 each | 016-1315-xx |
| Right Angle Square Pin Adapter | 2 each | 1 each | 214-4227-xx |
| 100 Mil Square Pin Adapter | 2 each | 1 each | 131-5777-xx |

Service

Opt. C3 – Calibration Service 3 Years

Opt. C5 – Calibration Service 5 Years

Opt. D1 – Calibration Data Report

Opt. D3 – Calibration Data Report 3 Years (with Opt. C3)

Opt. D5 – Calibration Data Report 5 Years (with Opt. C5)

Opt. R3 – Repair Service 3 Years








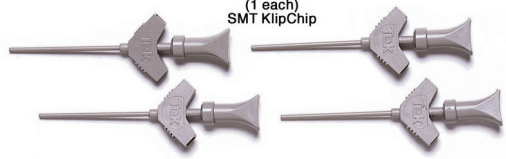

Opt. R5 – Repair Service 5 Years

Opt. SILV400 – Standard Warranty Extended to 5 Years (P6243).

Opt. SILV600 – Standard Warranty Extended to 5 Years (P6245).



P6245 / P6243
Part Reorder 1-800-833-9200

| | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>131-5777-xx 100 mil Square Pin Ground Adapter</p> |  <p>214-4227-xx Right Angle Square Pin Adapter</p> |  <p>Tektronix SF503 Solderless PROBE 0.5 mm SET OF 12 PAT. 5,387,872</p> |  <p>Tektronix SF502 Solderless PROBE 25mil SET OF 12 PAT. 5,387,872</p> |  <p>Tektronix SF501 Solderless PROBE 90mil SET OF 12 PAT. 5,387,872</p> |
|  <p>131-5638-xx Solderable Probe Tips</p> | |  <p>016-1315-xx Color Coding Clips</p> | | |
|  <p>206-0364-xx (1 each) SMT KlipChip</p> | | | | |
|  <p>196-3410-xx Ground Lead set</p> <p>6" Ground Leads 196-3436-xx</p> <p>1" Z Ground Leads 196-3439-xx</p> <p>3" Ground Leads 196-3437-xx</p> <p>Y-Leads 196-3463-xx</p> | | | | |



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.